Safety instructions

Important! Before commencing installation work disconnect the main cable from the power supply - remove fuse or turn switch to "OFF"!

1. Installation should be carried out in accordance with the local safety regulations.

2. In order to prevent damage, please check walls for cables before drilling holes.

3. Please ensure that all electrical connections (even preassembled lamps) are screwed tightly or are fully inserted as good contact is essential for a long life-span at high currents. Please check for tight

connections after changing or adjusting lamps. Screwed connections must be tightened after 20 minutes.

4. Please do not place objects on your system (e.g. for decorative purposes) if they were not delivered with the system.5. The lamps get very hot when in use. Please allow lamps to cool down before touching.

6. Do not change lamps or spots when switched on.

7. System should not be enlarged with additional lamps.8. We reserve the right to technical alterations.


Please keep these instructions.

Fitting: G9 Use of a dimmer is highly recommended (Must be compatible with type of bulb.)

The glass used for this lamp is hand-blown. Only 1st. quality has been chosen. Air bubbles and variations in thickness and colour is normal.

Miira 3/6 Large

Assembly Instructions

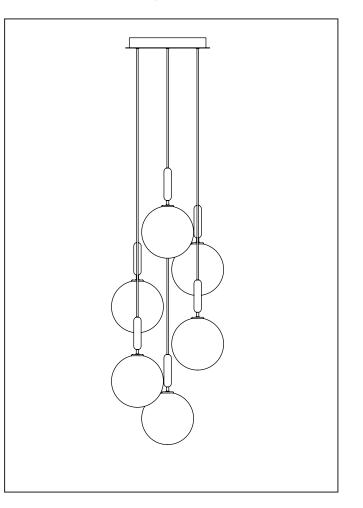


NUURA

www.nuura.com info@nuura.com CE


NUURA

© 2019 All rights reserved



Fixate the mounting plate to the ceiling with screws.

Please make sure it is fixated properly.



5

Lead the power cable into the ceiling plate and make sure the cable relief is thightened.

Connect the wire-ends to one of the cable connectors. Match the brown wire with "L" the blue wire with "N" and the green/yellow wire with the grounding symbol

Attach the cover plate to the ceiling plate by carefully sliding it up and let the magnets fixate the cover plate to the ceiling plate.


NB: Place your hands on the side or bottom of the cover plate, when sliding it up towards the ceiling plate.

Lead the cables through the cover plate.

3

1


2




Lead the cables through the cable relief and fixate the cable by turning the screw clockwise.

Be sure to tighten the screw carefully.


Lead the ends of the cabels into the cable connector. Place the brown wire-end in one of the two holes in "L", place the blue wire-end in one of the two holes in "N"

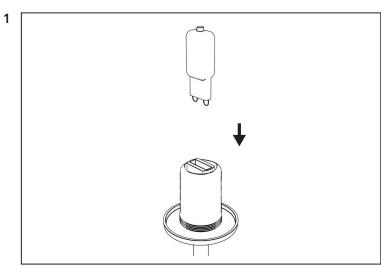

Place a G9 light bulb in the socket.

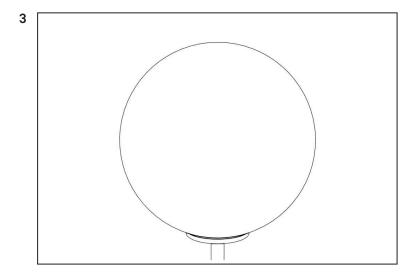

Completed.

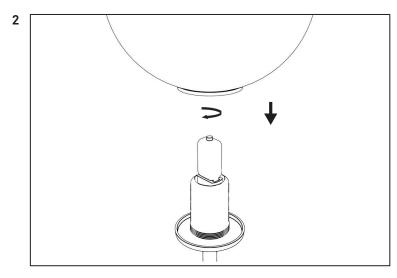

Take the glass globe and carefully place it over the light bulb. Fixate it by turning the glass globe clockwise.

Formation Suggetions

